



63 METER RZ-FOLD

5 SECTION

BOOM PUMP



JJRZ 63-5.20*

BOOM SPECIFICATIONS

Vertical Reach	62.2 m (204'1")
Horizontal Reach	58.2 m (190'11")
Reach from Front - Cabover	54.9 m (180'1")
Unfolding Height	12.8 m (42')
1st Section Length	12.8 m (42')
2nd Section Length	11.1 m (36'5")
3rd Section Length	11.1 m (36'5")
4th Section Length	12.0 m (39'4")
5th Section Length	11.2 m (36'9")
Outrigger	Swing Style
Front Spread	11.6 m (38'10")
Rear Spread	13.97 m (45'10")

GENERAL SPECIFICATIONS

Pipe Size (ID)	125 mm (5")
Boom Control Valve	Proportional (by HAWE)
Radio Remote:	Dual Wireless Transmitter System
Vibrator	Standard
Water Pump	Hydraulic Power 20 bar (290 psi)
Water Tank	800 L (211 G)
Wear Parts	Carbide
Popular Upgrades*	LED Boom Light Kit LED Outrigger Lights Heated Water Tank Heated Hydraulic Tank Air-Cuff Twin Wall Pipe 18 cell Pump Kit

*more options available, ask your sales rep for details.

PUMP SPECIFICATIONS

Output	Piston Side	200 m ³ /h (262 yd ³ /h)
Pressure	Piston Side	85 bar (1233 psi)
Concrete Cylinder Diameter		260 mm (10")
Concrete Cylinder Type		Hard Chromed
Stroke Length		2100 mm (83")
S-Tube Size		9" X 7"
Main Oil Pump		Rexroth Hydromatic A20VLO190
Hydraulic System Pressure		350 bar (5076 psi)
Lube System (Hopper)		Automatic
Switching System		Hydraulic
Hopper Capacity		Easy Clean 600 L (158 G)
Number of Strokes/Min		30
Output Control Range		20(26)~164m ³ /(215yd ³ /h)

*Not to be used through boom pipe.

*Contact your sales representative for alternate chassis options.

www.allianceconcretepumps.com



JJRZ 63-5.20

BOOM PUMP




1.888.584.7231



1.888.870.0908

Reach from front : 54.9m (180'1")

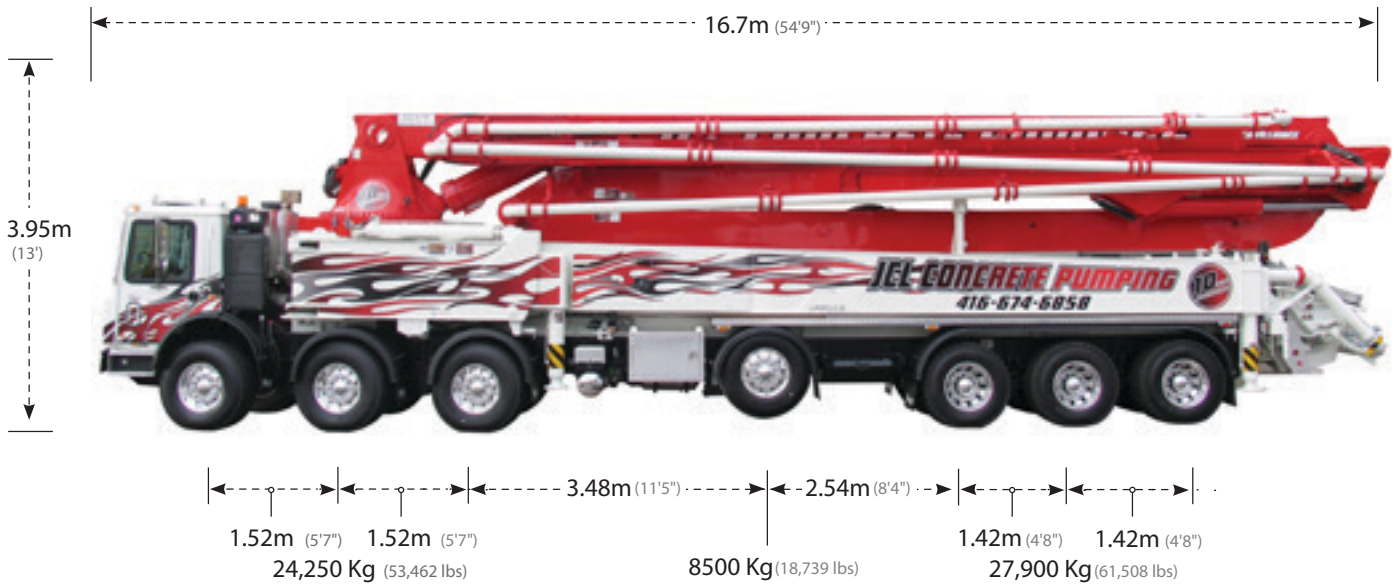

DIAGRAMS

